

B11

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/075894 A1

- (51) International Patent Classification⁷: **A61K 9/22**
- (21) International Application Number: PCT/EP03/02537
- (22) International Filing Date: 12 March 2003 (12.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
MI2002A000515 12 March 2002 (12.03.2002) IT
- (71) Applicant (for all designated States except US):
JAGOTEC AG [CH/CH]; Eptingerstrasse 51, CH-4132 MuttENZ (CH).
- (71) Applicant (for US only): **CONTE, Ubaldo** [IT/IT]; Via Treviglio, 6, I-21052 Busto Arsizio (IT).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **MAGGI, Lairetta** [IT/IT]; Via Folperti, 3, I-27100 Pavia (IT).
- (74) Agent: **GERVASI, Gemma**; Notarbartolo & Gervasi S.P.A., Corso di Porta Vittoria 9, I-20122 Milan (IT).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only
- Published:**
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A SYSTEM FOR THE CONTROLLED RELEASE OF ACTIVE INGREDIENTS

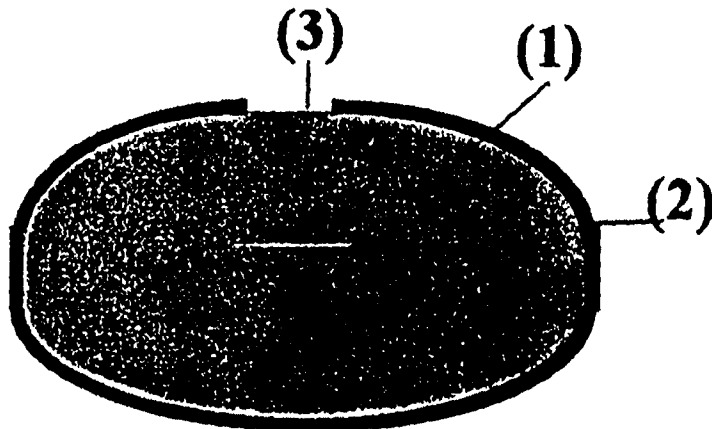

(57) Abstract: A new release system is disclosed for releasing one or more active substances vehicularised in it, at a predetermined rate and duration. The system is constituted by a pharmaceutical tablet, coated with a film of polymeric material impermeable and insoluble in aqueous fluids; on the coating film, one or more apertures of geometrically precise size and shape are made, through the use of a laser beam of appropriate power and intensity, in a way such that the active ingredient contained in the therapeutic system is released only from the non coated portion of the tablet surface at the desired rate and time. The technology for manufacturing such system is also described.



WO 03/075894 A1

"A SYSTEM FOR THE CONTROLLED RELEASE OF ACTIVE INGREDIENTS"

STATE OF THE ART

The release of an active substance in a specific site of action and the possibility of releasing such active substances with a rate programmable "*a priori*" and in a time interval pre-determined by means of appropriate *in vitro* control tests, certainly constitutes one of the major sectors of development in pharmaceutical technology. Research of this type has in fact been carried out and continues to be carried out in many applicative sectors, including the controlled release of drugs, of dietary supplements, and of anti parasitic agents, for the prolonged release of fertilisers, herbicides, insecticides, snail/slug killers and/or specific protection agents for certain cultures in the agricultural and veterinary sector. Certainly however, the most innovative research sector in this field is that of drugs for human use.

The always difficult research for new active molecules (New Chemical Entities), characterised by very expensive investments at very high risk, has induced, above all in the last decade, the pharmaceutical industry to study and develop new systems and devices for releasing known active substances, at controlled and programmable rate. This approach allows to obtain sometimes a surprising improvement of the therapeutic effects.

In addition, these new drugs delivering systems and devices are particularly well accepted by patients, in that they allow targeted therapies simplification of the dosing scheme and notable benefits for the patients who can use, above all for the therapies of chronic diseases, drugs with dosing which can be reduced to a single administration per day, thus notably increasing the compliance of the subject, above all in the case of elderly people.

One of the fundamental innovative aspects of the pharmaceutical forms and/or of the controlled release systems is also the possibility of targeting the release of the drug (or of the active substance) in a specific site of action and to free such active substances with at a rate programmable through appropriate *in vitro* control test.

In fact, one of the most developed sectors has been that of the pharmaceutical forms and therapeutic systems able to release the active substance at a constant rate over a programmed time interval. It is evident that vehiculation of an active ingredient in a system capable of controlling the rate of the *in vivo* release brings

about many therapeutic advantages such as maintaining a constant plasma concentration inside the therapeutic window for a prolonged period of time thus avoiding the fluctuations of the plasma levels associated with repeated administrations of conventional (rapid release) pharmaceutical forms and reducing the side effects and the undesired manifestations.

Amongst the pharmaceutical forms for oral administration, one of the most difficult problem to solve in the field of modified release of drugs (controlled and slowed), is represented by the control of the release of active ingredients or active substances having high solubility in aqueous environment.

In the field of pharmaceuticals, there have been many patents describing the preparation of pharmaceutical forms able to release the active ingredient with zero order kinetics, i.e. at a constant rate over time, and for a programmed period of time.

In particular, many of the embodiments known and used in therapy are constituted, in their simplest embodiment, by a hydrophilic matrix containing a drug and appropriate polymeric excipients able to release the active ingredient in modulated form (i.e. in a slowed form). In such matrix systems the active ingredient is dispersed in a polymer matrix; and the mechanism of release of the active ingredient relies on the physical-chemical characteristics of the matrix components.

Such matrix systems can be subdivided into:

- inert matrices

- hydrophilic gelable matrices

- hydrophilic erodible matrices

From a general point of view the rate of drug's release from a polymer matrix can be described by the first law of Fick:

$$\frac{DM}{dt} = \frac{A D K \Delta C}{h}$$

wherein

DM/dt = amount of drug released per unit of time

A= area available for release

D= diffusion coefficient

K = drug partitioning coefficient

$\Delta C = (C - C_s)$ concentration gradient between the two extremities of the layer to cross

h = thickness of the layer to cross

- 5 In the field of pharmaceuticals, the gelable and/or erodible hydrophilic matrices, manufactured by compression, are the most widely used modified release system for oral administration, thanks to the simplicity of production and the low costs. There are however some disadvantages and in particular the release of the vehicularised active ingredient does not take place at a constant rate but is
- 10 variable over time: when the matrix comes into contact with aqueous fluids or biological liquids the rate of release is notably high and diminishes progressively until, when the system is running out, in the final stage, the release becomes excessively slow.

- Following administration, from these systems plasma drug levels can be obtained
- 15 at times even higher but not constant over time. This release mechanism can give rise to a "burst effect" in the initial stage, provoking a rapid absorption and the possible rise of the same undesired side effects, that these systems should prevent. This phenomenon is directly connected to the intrinsic characteristics of the pharmaceutical form and to the surface area of the tablet exposed to release
- 20 which is very wide at the beginning of the process and reduces progressively over time.

- There are many examples of such pharmaceutical forms which are fully described in the literature, such as in L.F. Prescott and W.S. Nimmo "Novel drug delivery and its therapeutic application" J. Wiley - New York 1989 and in S. Dumitriu
- 25 "Polysaccharides in medicinal applications" M. Dekker - New York 1996.

- The pharmaceutical applications refer to dosage forms suitable for different administration routes such as oral, transdermal, vaginal, ocular. For their importance and vast use of the oral administration of drugs, the most numerous and diversified embodiments are those destined for the gastrointestinal route.
- 30 Besides the matrix systems, which constitute the simplest and easiest approach to modified release of active substances, technological research has developed more complex and sophisticated systems; amongst these, worthy of citation is the

OROS system described in the US patent No. 4,160,020. It deals with a system constituted by a nucleus containing the drug dispersed in an osmotic agent, coated with a rigid semi-permeable film acting like an osmotic membrane which allows the water to pass through but not the active ingredient dissolved therein. A small calibrated hole is made on the coating. When the system is immersed in an aqueous liquid or in a biological fluid the water is drawn inside the system generating a pressure (osmotic) which pushes the active substance, or better a concentrated solution of the active substance, to come out through the calibrated hole. When the system has reached equilibrium the rate of release is constant.

The above described system is however not easily realised above all in the case of molecules having scarce solubility; for example, an osmotic system suitable for vehicularising 90 mg of nifedipine (a scarcely soluble drug) would require an osmotic system of around 1300 mg constituted by a tablet of over 13 mm in diameter which is certainly not easy to administer and does not meet the compliance of the patients.

SUMMARY OF INVENTION

We have now unexpectedly found a new pharmaceutical form for oral administration, able to release one or more active ingredients or biologically active substances, at constant rate and for a certain period of time predeterminable through appropriate *in vitro* tests, which allows to overcome the drawbacks described above for the systems known in the art, and in particular the inconveniences of the OROS system.

The morphological and functional characteristics of the present therapeutic system will be illustrated in the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1 and 2: cross sectional views of the present tablet, showing the nucleus (1), the film coating (2) and the incision (3) delimiting an area of different dimensions.

DETAILED DESCRIPTION OF THE INVENTION

The release system according to the invention, as represented in Figures 1 and 2, is constituted by a pharmaceutical tablet comprising a nucleus coated with a film of polymeric material, insoluble and impermeable to water, characterised in that on

said coating are made one or more incisions delimiting an area having exactly programmable and defined dimensions and geometric shape. Upon contact with water or with biological fluids, the portion of the coating film inside the incision(s) detaches and the active ingredient contained in the therapeutic system is released through that portion of the tablet surface that remained uncovered.

The incision(s) are preferably made by a laser beam.

The therapeutic system of the invention can be manufactured by the current manufacturing technologies, and therefore the system is immediately scalable to the industrial level, in particular as far as the system of the incision in the coating through the use of a laser beam is concerned.

The nucleus can be constituted of, in addition to the active substance, also other components, excipients and polymeric materials having different solubility, different hydrophilicity, different rates of hydration, erosion and/or gelation.

Usually such types of tablets are indicated as polymeric matrices with modified release and are preferably designed for the oral administration of biologically active substances.

The formulation of the tablet according to the present invention comprises hydrophilic and/or lipophilic polymeric materials in different percentages and is characterised in that the release of the active substance(s) takes place, as a function of the tablet structure, according to kinetics pre-programmable through appropriate *in vitro* tests.

One of the characteristics of the present tablet consists in the fact that in the preparation of the nucleus, in addition to the active ingredient(s), also polymeric substances capable of modulating (slowing and/or accelerating) the release of the active ingredient(s) are used.

As the active ingredients non steroid anti inflammatory drugs (NSAID) can be used, such as sodium dichlophenac, indomethacine, ibuprofen, ketoprofen, diflunisal, pyroxicam, naproxene, flurbiprofen, sodium tolmetin, or steroid anti inflammatory or substances inducing sleep and tranquillisers such as diazepam, nitrazepam, flurazepam, oxazepam, chlordiazepoxide, medazepam, lorazepam or active ingredients for the control of hypertension, for example Ace inhibitors or calcium antagonists such as enalapril, nifedipine, nitrendipine, nicardipine or

diltiazem, propranolol, atenolol, pindolol, prazosin, ramipril, spirapril, spironolactone, methypranolol, molsidomine, moxonidine, nadolol, nadoxolol, levodopa, metoprolol, timolol or anti histaminic and/or antiasthmatic drugs such as ephedrine, terphenadine, teofilline, chlorpheniramine, or beta lactamic antibiotics, alone and in association, and derivatives thereof such as ampicillin, amoxicillin, cefradine, salts or derivatives thereof, and in particular in association with inhibitors of beta lactamase such as clavulanic acid.

Inside said polymeric matrix can be vehicularised: active substances for the treatment of chronic diseases such as drugs active on the cardiovascular system, anti arrhythmics, cardiac stimulants, vasodilators, anti hypertensives, anti adrenergic substances with central or peripheral action or substances acting on the smooth arteriolar musculature, substances acting on the renin-angiotensin system, anti hypertensives and diuretics in association, diuretics anti Parkinson drugs for the treatment of Alzheimer's and Parkinson's diseases.

The preparation of the tablets (nucleus) can be carried out by the usual compression techniques of the mixture of powders or granulates, operating at pressures ranging between 1000 and 5000 Kg/cm².

Polymeric substances of possible use in the preparation of said matrix (or nucleus) are for example polyvinylpyrrolidone, hydroxypropylmethylcellulose with molecular weights from 2.000 to 4.000.000, sodium carboxymethylcellulose, carboxymethylamide, potassium methacrylate-divinylbenzene copolymer, polyvinylalcohols, hydroxypropylcellulose with molecular weights from 2000 to 4000000, polyoxyethylene (PEO) of molecular weight ranging between 100 and 10000000, carboxyvinylpolymers, polyvinylalcohols with molecular weight from 10000 to 1000000, glucans, scleroglucans, mannans, carragenans, galactomannans, gellans, xanthans, alginic acid and derivatives, polyanhydrides, polyaminoacids, poly-(methyl vinyl ethers/ maleic anhydride) carboxymethylcellulose and derivatives, ethylcellulose, methylcellulose and cellulose derivatives in general, amides, starch derivatives, alpha, beta, gamma cyclodextrins and dextrine derivatives and copolymers of the above cited polymers.

Said polymeric substances constitute from 1% to 90% of the weight of the matrix

(or nucleus), and preferably between 5% and 50%.

All cited polymers are commercially available in different pharmaceutically acceptable forms, characterised by different physical-chemical properties, and by different solubility and gelation properties.

- 5 In particular, as far as hydroxypropylmethylcellulose is concerned, various types of this polymer can be used, having different molecular weights (from 1000 to 4000000) and different degrees of substitution. Said types of hydroxypropylmethylcellulose have differentiated characteristics, and are prevalently erodible or prevalently gelable, according to the viscosity or to the
10 degree of substitution (D.S.) in the polymeric chain.

In the nucleus substances which facilitate the disintegration of agglomerates can be also find use, such as the disintegrants commonly used in the pharmaceutical field and well known to any person skilled in the art and/or the super disintegrants, such as crosslinked polyvinylpyrrolidone, crosslinked sodium
15 carboxymethylcellulose, sodium amidoglycolate, and microcrystalline cellulose.

In order to favour the release of the active substance, pharmaceutically acceptable effervescent mixtures, known to any person skilled in the art, can also be used.

A fundamental characteristic of the new embodiment is constituted by the fact that in addition to the previously cited hydrophilic polymers, in the formulation can find
20 use lipophilic and/or amphiphilic substances, in which the hydrophilic portion can be represented by polyalcohols whilst the lipophilic part is represented by unsaturated or saturated fatty acids, in the form of hydrogenated vegetable oils. The association of the hydrophilic portion with the lipid chain is obtained by esterification or partial alcoholysis of hydrogenated vegetable oils by PEG
25 molecules or glycerol or other polyol. This way one obtains compounds having differing degrees of hydrophilicity which can be evaluated by the determination of the Hydrophilic-Lipophilic Balance (HLB) value. Triglycerides with HLB values between 1 and 2, diglycerides with HLB values between 2 and 3, monoglycerides with HLB values between 3 and 4, PEG diesters with HLB values between 6 and
30 15, PEG monoesters with HLB values between 10 and 17, triglycerides with HLB values between 1 and 2 are available. In practice, the higher is the HLB value, the greater is the hydrophilic character and, obviously, the lower is the lipophilic

character.

Finally, excipients commonly used in pharmaceuticals can be used in the present nucleus, such as mannitol, lactose, sorbitol, xylitol, talc, stearic acid, sodium benzoate, magnesium stearate, colloidal silica and others such as glyceryl monostearate, hydrogenated castor oil, waxes, mono-, di- and tri-substituted glycerides, glycerylpalmitoylstearate, glyceryl behenate, cetyl alcohol.

When it is desired to favour the penetration of water and/or aqueous fluids into the nucleus, hydrophilic diluents are added, such as mannitol, lactose, starches of various origins, sorbitol, xylitol, wetting agents and/or agents favouring the penetration of water into the agglomerate are added to the formulation.

Instead, when it is desired to slow the penetration of water and/or aqueous fluids into the nucleus, hydrophobic diluents are added, such as glyceryl monostearate, hydrogenated castor oil, waxes and mono-, di- and tri-substituted glycerides.

In addition, diluents, binding agents, lubricants, buffers, anti adherents, glidants, plasticisers, and other substances able to confer to said layer the desired characteristics can be used in the nucleus as will be better explained in the examples reported below:

The tablet which constitutes the nucleus of the new release system according to the present invention is completely coated by film coating in a coating pan or by another industrially applicable procedure, with appropriate impermeable and insoluble coatings, which impede the release of the active ingredient from the coated surface.

For the coating of said tablets polymeric materials insoluble in water such as acrylates, methacrylates and ethylcellulose can find use.

The filming procedure can be carried out by the traditional method in a coating pan, or in a perforated basin or in a fluidised bed according to processes known to any person skilled in the art.

To obtain a homogeneous coating applied uniformly on the whole surface of the tablet, in the composition of the coating solution or suspension, are used plasticising substances such as triethylcitrate, ethyl phthalate, butyl phthalate, diethylsebacate, propylene glycol, polyoxyethyleneglycols with different molecular weights, castor oil.

In addition are also used colouring agents and/or substances altering opacity according to the characteristics of the coating.

Said coating, prior to the operation of the incision by laser beam, constitutes from 0.2 to 30% of the tablet weight, and preferably from 2 to 25%.

5 Only onto the coating are made one or more incisions delimiting an area having predetermined geometric shape and exactly controlled dimensions; the incision(s) can be made on any part of the coating of the tablet, preferably on one face, and have dimensions ranging from 2% to 80%, and preferably from 5% to 70% of the total surface of the coating.

10 The coating is removed by the use of a laser beam which creates a precise incision of predetermined geometric shape (in the most simple case a circle) and of an area defined with extreme precision so that only the coating is cut without touching the underlying section of the tablet. The incision in the coating by laser beam can be carried out on one or both faces of the tablet, making a single
15 incision or more incisions so as to obtain a free surface area, able to release the active substance, at the desired rate and in a pre-determined time interval, by interaction with the means of dissolution.

The incision in the coating allows the penetration of dissolution fluid. The contact with water or with the biological fluid determines the beginning of the erosion
20 and/or of the slow gelation of the constituents of the matrix system with the consequent lifting of the film portion inside the incision, the coating detaches and provokes the exposure of the surfaces of the nucleus and therefore the full interaction between the means of dissolution and the nucleus containing the active substance.

25 The new controlled release system of the invention is therefore characterised in that the release of the active ingredient contained in the tablet by interaction with the means of dissolution can take place only through the hole(s) made in the coating and therefore at a rate that depends on the area of the exposed surface and not on the osmotic pressure.

30 More precisely, the dose of drug begins to be released only through the hole(s) made in the coating, at a rate that depends on the area of the exposed surface which is in contact with water or with biological fluids and therefore, in case the

hole(s) are circular, it depends on the diameter of the hole(s).

According to a further embodiment of the present invention, on the filmed tablet having one or more incisions on the insoluble coating, as previously described, a second gastro-resistant and enterosoluble polymeric coating is applied, based for
5 example on acrylic and methacrylic copolymers, cellulose aceto-phthalate, cellulose aceto-propionate, cellulose trimellitate and other natural, synthetic or semi-synthetic derivatives of cellulose, of hydroxypropylcellulose, of hydroxypropylmethylcellulose, for example hydroxypropylmethylcellulose acetate succinate.

- 10 This allows an additional control over release, because in the gastric environment the active substance vehicularised in the system is not released and the system is activated only at the enteric level, when the enterosoluble coating dissolves. The release of the vehicularised active ingredient begins only following the coating solubilisation and takes place only through the hole made in the coating of
15 impermeable polymeric material.

This configuration of the tablet allows the active substance to be released only at the enteric level, and can be used to obtain the release of drugs up to the distal portion of the enteric tract, for a release at the level of colon or the rectum.

- Further object of the present invention is a procedure for the preparation of the
20 present therapeutic system. Such a procedure includes the preparation of a coated tablet according to traditional techniques, known to any skilled person, followed by the incision of the coating of the tablet by the use of a laser beam.

- In particular, the filmed tablets are positioned onto a horizontal plane and one face of the tablet is incised by exposure to a laser beam. The duration of exposure to
25 the laser beam depends on the thickness of the coating and on the power of the laser apparatus. For example, if a laser apparatus having a power of 20 W is used, an exposure of 100 milliseconds is necessary to cut a coating having a thickness of 100 μm .

- The release system of the invention has the advantage of releasing the active
30 ingredient vehicularised in a programmed manner and it is therefore possible to vehicularise a reduced quantity of drug, with respect to the traditional delayed release forms, avoiding the phenomenon of dose dumping; therefore, the present

release system having a controlled release of the active ingredient satisfies specific therapeutic requirements.

In the following examples, the morphological characteristics and functions of the present innovative therapeutic systems will be better illustrated. In particular, matrix systems containing a soluble active ingredient are prepared. Said matrix systems are then completely coated with an insoluble coating (for example based on ethylcellulose), onto which a second gastroresistant and enterosoluble coating (for example based on acrylic and methacrylic copolymer) can be applied, as it is known to any person skilled in the field.

- 10 The examples and the results obtained in the pharmaceutical forms described above, highlight better the conceptual and functional characteristics of the new system.

Example 1: Preparation of a series of (5000) tablets containing as the active ingredient 120 mg of Diltiazem

- 15 1.a - Composition of the matrix

Diltiazem HCl	120.0 mg
Hydroxypropylmethylcellulose (Methocel® E4M)	60.0 mg
Lactose (FU)	60.0 mg
20 Methylcellulose (Methocel® A4)	0.7 mg
Magnesium stearate (FU)	2.0 mg
Colloidal silica (Siloyd® 244)	1.0 mg
Total	243.7 mg

- 25 The appropriate quantity of Diltiazem, lactose and hydroxypropylmethylcellulose (Methocel® E4M) are mixed in a V shaped mixer. The homogeneous mixture is wetted with an aqueous solution of methylcellulose. The humid mass is forced through a 25 mesh grid obtaining a granulate which is dried in an oven to constant weight, added with magnesium stearate and colloidal silica and then mixed in a V shaped mixer for 15 min.

30 The granulate thus obtained is used for the preparation of the tablets as reported in the following point 1.b.

1.b - Preparation of the tablets

The granulate obtained according to above reported procedures and according to schemes well known to any skilled person, is loaded into the loading hopper of a rotary press (Piccola - Ronchi-Milan).

- 5 The machine press, fitted with rounded dies of 10.0 mm in diameter, is set so as to produce tablets of 243.7 mg containing the active ingredient (equal to 120 mg of diltiazem).

1.c - Filming process

Percentage composition of the coating:

10

Copolymer of acrylic and methacrylic acid (Eudragit® L 30 D

Rohm Pharma, D) 18.50 %

Talc (C. Erba, Milan, I) 5.60 %

Triethylcitrate (C. Erba, Milan, I) 1.80 %

15 Water 74.10 %

Total 100.00%

The filming process is carried out using a coating pan for rapid coating (Manesty Accela-Cota) spraying, through an "air-less" system, a 30% aqueous dispersion of
20 the acrylic and methacrylic acid copolymer (Eudragit® L 30 D) in which triethylcitrate is dissolved.

Operating with an air entry temperature of around 40-50°, according to the technique known to every expert in the field, tablets are obtained, which are coated with a uniform film of the above reported polymeric material.

25 1.d - Incision of the coating

The filmed tablets, obtained as described in the preceding point 1.c, are positioned on a horizontal plane so as to present one face exactly below the beam of laser light produced by a CO₂ laser apparatus having a power of 20 W.

Centrally on the surface (coating) of one face of the tablet, circular incision(s) are
30 made, having a diameter of 5.0 mm or of 7.0 mm only on the coating.

The incision(s) are made in a time of approx. 100 thousandths of a second and effect a thickness of approx. 100 μm, equal to the thickness of the coating.

1.e – Dissolution test

The release systems prepared and described above in the examples 1.c and 1.d, i.e. respectively non coated tablets and tablets with the coating cut circularly (with diameters respectively of 5.0 mm or 7.0 mm) have been studied to evaluate the characteristics of the release of the active ingredient.

The apparatus 2, paddle (USP XXII) operating at 100 r.p.m. and 1 l of hydrochloric acid at pH 1.0 as such dissolution fluid, are used. The release of the active ingredient is followed by UV spectrophotometric determination at 236 nm using an automatic sampling and reading system (Beckman). Upon contact with the dissolution fluid, the part of the coating which has been effected by the laser incision, is raised by the light swelling of the tablet, thus freeing a circular surface of the nucleus of diameter 5.0 mm (equal to an area of approx. 19.5 mm²) or 7.0 mm (equal to an area of approx. 38.5 mm²).

The results of the tests carried out are reported in Table I.

TABLE I

Time (min)	% release non coated tablet	% release hole 19.5 mm ²	% release hole 38.5 mm ²
30	19.6	0.7	1.9
60	32.8	2.4	4.0
120	48.7	4.7	8.7
240	74.2	9.1	19.8
360	91.0	12.6	27.2
480	100.7	16.2	34.5
720		20.1	50.9
960		28.7	64.3
1200		42.0	78.9

As can be easily seen from the Table I it is evident that from the non filmed tablet the active ingredient is released in approx. 7-8 hours. With respect to the non

filmed tablet, the tablets with the cut coating show a release of the active ingredient at a controlled rate. In particular, the active ingredient can be released at different rates as a function of the area of the hole made in the coating. With equal compositions, from the filmed tablet with the circular hole of 7.0 mm in the coating (equal to 38.5 mm²) the active ingredient is released at a greater rate with respect to the system with the hole of 5.0 mm. (equal to 19.5 mm²).

This result fully answers to the objectives of the invention. It should be underlined that from the non filmed tablet the active ingredient is released more quickly.

Example 2: Preparation of a series of 5,000 tablets containing as the active ingredient 120 mg of Diltiazem.

In this formulation hydroxypropylmethylcellulose with lower molecular weight is used, which allows to obtain a different rate of release of the active ingredient with respect to that observed in Example 1.

2.a - Composition of the matrix:

Diltiazem HCl	120.0 mg
Hydroxypropylmethylcellulose (Methocel® E50)	60.0 mg
Lactose (FU)	60.0 mg
Polyvinylpyrrolidone (Plasdone® K30 -I.S.P.)	8.0 mg
Magnesium stearate (FU)	1.0 mg
Colloidal silica (Siloyd® 244)	0.5 mg
Total	249.5 mg

The appropriate quantity of Diltiazem with lactose and hydroxypropylmethylcellulose (Methocel® E50) are mixed in a V shaped mixer for 15 min., obtaining a homogeneous mixture which is then humidified with a hydroalcoholic solution of polyvinylpyrrolidone. The humid mass is forced through a 35 mesh grid, obtaining a granulate which is dried in an oven to constant weight, then added with magnesium stearate and colloidal silica, and mixed in a V shaped mixer for 15 min.

The mixture thus obtained is used for the preparation of the tablets as reported in the following point 2.b.

2.b - Preparation of the tablets

The granulate obtained as described above according to well known procedures, is loaded into the loading hopper of a rotary press (Piccola-Ronchi-Milan).

The machine press, fitted with rounded dies of 10.0 mm of diameter, is set so as to produce tablets of 249.5 mg containing the active ingredient (equal to 120 mg of diltiazem).

2.c -Filming process

Percentage composition of the coating:

10	Surelease® (Colorcon® U.K)	70.00 %
	Water	30.00 %
	Total	100.00%

The filming process is carried out using a coating pan for rapid coating (Manesty Accela-Cota) spaying, through an "air-less" system a 70% aqueous dispersion of Surelease®. This filmogenic dispersion is commercially available; it is an aqueous dispersion of ethylcellulose and contains diethylsebacate as a plasticiser and oleic acid as a stabiliser. The aqueous dispersion is diluted with water prior to use.

2.d – Removal of a known portion of the coating

20 The coated tablets obtained as described above in example 2.c, are positioned on an horizontal plane so as to present one face exactly below the beam of the laser light produced by a CO₂ laser apparatus having a power of 20 W.

Centrally on the surface of one face of the tablet, circular incisions are made, having a diameter of 5.0 mm or of 7.0 mm only on the coating.

25 The incision is carried out in a time of approx. 100 thousandths of a second and effects a thickness of approx. 100 μ m equal to the thickness of the coating.

2.e – Dissolution test.

The release systems prepared and described in the example 2.c and 2.d, respectively non filmed tablets and tablets with the coating which have circular incisions of diameter of 5.0 mm or 7.0 mm on just the coating, are studied to evaluate the release characteristics of the active ingredient.

At this aim, the apparatus 2, paddle (USP XXII) operating at 100 r.p.m. and 1 l of

hydrochloric acid at pH 1.0 as such dissolution fluid, are used. The release of the active ingredient is followed by UV spectrophotometric determination at 236nm using an automatic sampling and reading system (Beckman). Upon contact with the dissolution fluid, the part of the coating which has been effected by the laser incision, is raised by the slight swelling of the tablet, thus freeing a surface of the nucleus respectively of 19.5 mm² or 38.5 mm². The results of the tests carried out are reported in Table II.

TABLE II

	Time (min)	% release non coated tablet	% release hole 19.5 mm ²	% release hole 38.5 mm ²
	15	19.5	0	0
	30	39.4	1.2	3.5
	60	72.5	3.8	12.7
15	90	93.1	8.1	22.8
	120	100.8	12.6	32.5
	180		23.3	50.7
	240		38.7	68.4
	300		59.5	88.2
20	360		80.5	95.6
	420		93.8	96.0
	480		97.8	98.8
	540		98.3	
	600		99.4	

As one can easily see from the Table II, it is evident that from the non filmed tablets the active ingredient is released in approx. 2 hours. With respect to the non coated tablets, the tablets with the cut coating show a release of the active ingredient at a controlled rate. The active ingredient can be released at different rates as a function of the area of the hole made in the coating. At equal compositions, from the filmed tablet with the circular hole of 7.0 mm in the coating (equal to 38.5 mm²) the active ingredient is released at a greater rate with respect

to the system with the hole of 5.0 mm. (equal to 19.5 mm²). This result fully answers to the objectives of the invention.

Example 3: Preparation of a series of (5.000) tablets containing as the active ingredient 180 mg of Diltiazem

5 3.a - Composition of the matrix:

Diltiazem HCl 180.0 mg
Hydroxypropylmethylcellulose (Methocel[®] E50) 90.0 mg
Lactose (FU) 90.0 mg
10 Polyvinylpyrrolidone (Plasdone[®] K30 -I.S.P.) 12.0 mg
Talc (FU) 4.0 mg
Magnesium stearate (FU) 2.0 mg
Colloidal silica (Silloyd[®] 244) 0.5 mg
Total 378,5 mg

15

The appropriate quantity of Diltiazem with lactose and hydroxypropylmethylcellulose (Methocel[®] E50) are mixed in a V shaped mixer for 15 min. A homogeneous mixture is obtained, which is humidified with a hydroalcoholic solution of polyvinylpyrrolidone. The humid mass is forced through
20 a 25 mesh grid, obtaining a granulate which is dried in an oven to constant weight, added with talc, magnesium stearate and colloidal silica, and then mixed in a V shaped mixer for 15 min.

The mixture thus obtained is used for the preparation of the tablets as reported in the following example 3.b.

25 3.b - Preparation of the tablets

The granulate obtained according to the above reported procedure and according to schemes well known to all the experts in the field, is loaded into the loading hopper of a rotary press (Piccola - Ronchi-Milano).

The machine press, equipped with rounded dies of 10.0 mm in diameter, is set up
30 so as to produce tablets of 378.5 mg containing the active ingredient (equal to 180 mg of diltiazem)

3.c - Filming process

Percentage composition of the coating:

Copolymer of acrylic and methacrylic acid (Eudragit® L 30 D

Rohm Pharma, D) 18.50 %

5 Talc (C. Erba, Milan, I)) 5.60 %

Triethylcitrate (C. Erba, Milan, I)) 1.80 %

Water 74.10 %

Total 100.00%

The filming process is carried out using a coating pan for rapid coating (Manesty
10 Accela-Cota) spraying, through an "air-less" system a 30% aqueous dispersion of
the acrylic and methacrylic acid copolymer (Eudragit® L 30 D) in which
triethylcitrate is dissolved.

The procedure is carried out with the air in entry at a temperature of approx. 40-
50°C, according to a known technique, thus obtaining tablets which are completely
15 coated by an uniform film of the above said polymer material.

3.d – Incision of the coating

The coated tablets obtained as described above in example 3.c, are positioned on
a horizontal plane so as to present one face exactly below the beam of the laser
light produced by a CO₂ laser apparatus having a power of 20 W.

20 Centrally on the surface (coating) of one face of the tablet, circular incisions are
made, having a diameter of 5.0 mm or of 7.0 mm only on the coating.

The incision is carried out in a time of around 100 thousandths of a second and
effects a thickness of approx. 100 μ m, equal to the thickness of the coating.

3.e – Dissolution test.

25 The release systems prepared and described in examples 3.c and 3.d,
respectively non filmed tablets and tablets with the coating having circular
incisions of 5.0 mm or of 7.0 mm in diameter only on the coating, have been
studied to evaluate the system characteristics in releasing the active ingredient. At
this aim, the apparatus 2, paddle (USP XXII) operating at 100 r.p.m. and 1 l of
30 hydrochloric acid at pH 1.0 as dissolution fluid, are used. The release of the active
ingredient is followed by UV spectrophotometric determination at 236nm using an
automatic sampling and reading system (Beckman). Upon contact with the

dissolution fluid, the part of the coating which had been effected by the laser abrasion, raises due to the slight swelling of the tablet, thus freeing a surface of the nucleus respectively of 19.5 mm² or 38.5 mm². The results of the tests carried out are reported in Table III.

5 **TABLE III**

Time (min)	% release mm ² hole 38.5 mm ²	% release mm ² hole 19.5 mm ²	% release non coated tablet	% release hole 19.5 mm ²
------------	--	--	--------------------------------	--

	60	44.3	5.5	10.2
10	120	77.9	15.1	23.8
	180	98.8	24.6	40.1
	240	99.6	38.0	57.9
	300	99.8	50.8	72.0
	360	100.2	66.0	85.3
15	420	101.0	77.2	93.0
	480	101.0	87.0	98.8
	600	101.0	100.1	100.3

As can be easily seen from the Table III, it is clear that from the non filmed tablet the active ingredient is released in approx. 3-4 hours. With respect to the non coated tablets, the tablets with the cut coating show a release of the active ingredient at a controlled rate. The active ingredient can be released at different rates as a function of the area of the hole made in the coating. At equal compositions, from the filmed tablet with a hole of 38.5 mm² in the coating the active ingredient is released at a greater rate with respect to the system with a hole of 19.5 mm².

This result fully answers to the objectives of the invention.

CLAIMS

1. A therapeutic system for the oral administration of one or more active ingredients in form of a tablet, characterised by the fact of comprising a nucleus containing the active ingredient(s) completely coated by a film coating of polymeric material, insoluble and impermeable to aqueous fluids, on which have been made one or more incisions which define an area of predetermined dimensions and shape as a function of the rate and the progress of release of the active ingredient(s) desired, said release taking place from the area of the nucleus underlying the surfaces of the coating film delimited by the incision(s) which is removed when the therapeutic system comes into contact with aqueous fluids.
2. The therapeutic system according to claim 1 in which the nucleus comprises one or more polymeric substances able to modulate the release of the active ingredient.
3. The therapeutic system according to claim 2, in which said polymeric substances constitute between 1% and 90% in weight of said nucleus.
4. A therapeutic system according to claim 3, in which said polymeric substances constitute between 5% and 50% in weight of the said nucleus.
5. The therapeutic system according to claim 1, in which the nucleus further comprises one or more disaggregating and/or super disaggregating agents.
6. The therapeutic system according to claim 1, in which the nucleus further comprises one or more effervescent mixtures.
7. The therapeutic system according to claim 1, in which the nucleus further comprises hydrophilic diluents and/or wetting agents.
8. The therapeutic system according to claim 1, in which the nucleus further comprises hydrophobic diluents.
9. The therapeutic system according to claim 1 in which the nucleus further comprises one or more substances selected from binding agents, lubricants, buffers, antiadherents, glidants and plasticisers.
10. The therapeutic system according to claim 1 in which the insoluble coating film comprises one or more plasticising substances.
11. The therapeutic system according to claim 1 in which the insoluble coating film constitutes from 0.2% to 30% in weight of the weight of the tablet.

12. The therapeutic system according to claim 11 in which the insoluble coating film constitutes from 2% to 25% in weight of the weight of the tablet.

13. The therapeutic system according to 1 in which the incision(s) define an area of dimensions comprised of between 2% and 80% of the total surface of the
5 coating film.

14. The therapeutic system according to claim 13 in which the incision(s) define an area of dimensions comprised of between 5% and 70% of the total surface of the coating film.

15. The therapeutic system according to claim 1, in which onto the insoluble
10 coating film a second film of gastroresistant and enterosoluble polymeric coating is applied.

16. A process for the manufacture of a therapeutic system according to claim 1, characterised by the fact that the incision(s) in the coating film are made by laser.

17. The process according to claim 16, in which the incision(s) in the coating film
15 are made with a CO₂ laser device having a power of 20 W.

20

25

30

1/1

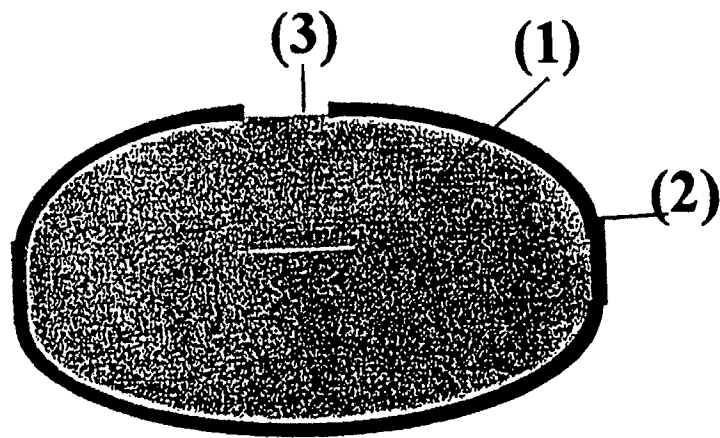


Fig. 1

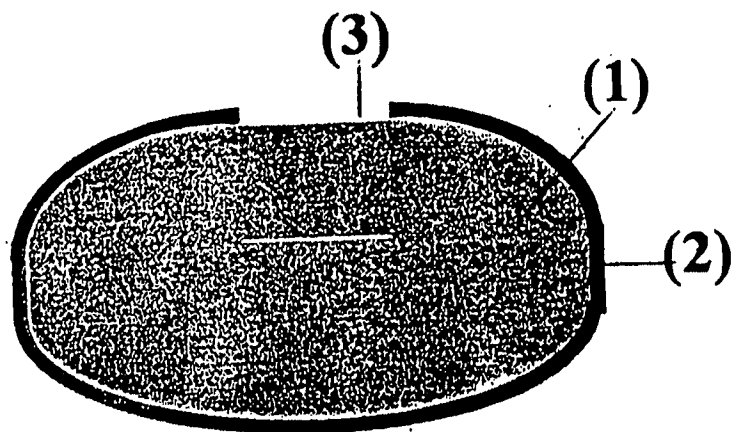


Fig. 2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/02537

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61K9/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, BIOSIS, EMBASE, MEDLINE

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 256 440 A (APPEL LEAH E ET AL) 26 October 1993 (1993-10-26) column 1, line 65 - column 2, line 7 column 2, line 24 - line 31; figure 1 column 7, line 9 - line 10 examples claims	1-5, 7-14
X	WO 94 01239 A (MERCK & CO INC) 20 January 1994 (1994-01-20) page 5, line 29 - page 6, line 9 page 6, line 34 - page 7, line 1 page 8, line 1 - line 13 examples claims	1-5, 7-14, 16, 17

	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

29 July 2003

Date of mailing of the international search report

05/08/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Epskamp, S

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/02537

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 18478 A (ALZA CORP) 20 June 1996 (1996-06-20) page 6, line 24 - line 29; figures 3,4 page 14, line 17 -page 15, line 28 claims ----	1-17
A	EP 0 631 775 A (EKITA INVESTMENTS NV) 4 January 1995 (1995-01-04) page 3, line 1 - line 19 page 5, line 13 - line 43 examples figures claims ----	1-17
A	EP 0 294 993 A (PFIZER) 14 December 1988 (1988-12-14) column 1, line 46 -column 2, line 8 column 5, line 4 - line 10 column 6, line 51 - line 55 examples figures claims -----	1-17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/02537

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5256440	A	26-10-1993	NONE	
WO 9401239	A	20-01-1994	US 5376771 A AU 4657093 A CA 2137697 A1 EP 0649358 A1 JP 3058350 B2 JP 7508674 T WO 9401239 A1	27-12-1994 31-01-1994 20-01-1994 26-04-1995 04-07-2000 28-09-1995 20-01-1994
WO 9618478	A	20-06-1996	US 5658474 A AT 185998 T AU 4373296 A DE 69513044 D1 DE 69513044 T2 DK 797491 T3 EP 0797491 A1 ES 2139956 T3 GR 3032378 T3 JP 10510787 T WO 9618478 A1 US 5698119 A	19-08-1997 15-11-1999 03-07-1996 02-12-1999 08-06-2000 03-04-2000 01-10-1997 16-02-2000 27-04-2000 20-10-1998 20-06-1996 16-12-1997
EP 0631775	A	04-01-1995	IT 1264517 B1 AT 183386 T AU 677833 B2 AU 6342694 A CA 2124553 A1 DE 69420087 D1 DE 69420087 T2 DK 631775 T3 EP 0631775 A1 ES 2138633 T3 GR 3031841 T3 JP 7138150 A NZ 260630 A SI 631775 T1 US 5487901 A US 5650169 A	24-09-1996 15-09-1999 08-05-1997 08-12-1994 01-12-1994 23-09-1999 23-03-2000 06-03-2000 04-01-1995 16-01-2000 29-02-2000 30-05-1995 28-08-1995 29-02-2000 30-01-1996 22-07-1997
EP 0294993	A	14-12-1988	US 4792448 A AT 64850 T AU 598938 B2 AU 1761488 A CA 1326821 C CN 1030358 A ,B CS 8804011 A2 DD 284599 A5 DE 3863493 D1 DK 318788 A EG 18919 A EP 0294993 A1 FI 882780 A ,B, GR 3002260 T3 IE 61123 B1 IL 86631 A JP 1009930 A JP 1955902 C	20-12-1988 15-07-1991 05-07-1990 15-12-1988 08-02-1994 18-01-1989 14-08-1990 21-11-1990 08-08-1991 06-02-1989 30-06-1994 14-12-1988 12-12-1988 30-12-1992 05-10-1994 16-09-1991 13-01-1989 28-07-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/02537

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0294993 A		JP 6088900 B	09-11-1994
		KR 9004092 B1	15-06-1990
		NO 882565 A ,B,	12-12-1988
		NZ 224981 A	26-07-1991
		PH 25174 A	27-03-1991
		PT 87701 A ,B	01-07-1988
		RU 2072835 C1	10-02-1997
		YU 112688 A1	30-04-1990
		ZA 8804163 A	28-02-1990
